


Dial Test Indicators

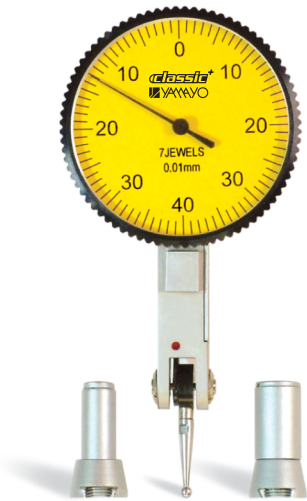

FEATURES

- Provides easy and accurate measurements of narrow and recessed areas.
- Two way measuring directions
- High Sensitivity and Quick Response.
- Jeweled Movement.
- Carbide Contact point is provided as standard.
- Supplied with dovetail locks.

SPECIFICATIONS & DIMENSIONS

Order No.	Range	Graduation	Accuracy (\pm)	Hysteresis	Dial Reading	D \emptyset	L
445-08	0.8mm	0.01mm	13 μ m	3 μ m	0-40-0	30	21.5
446-08	0.8mm	0.01mm	13 μ m	3 μ m	0-40-0	38	21.5
447-02	0.2mm	0.002mm	6 μ m	2 μ m	0-100-0	37.5	16

